


REVISIONS

 ZONE
 REV.
 DESCRIPTION
 DATE
 APPROVED

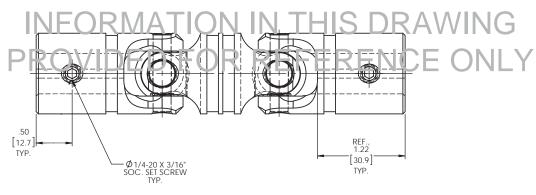

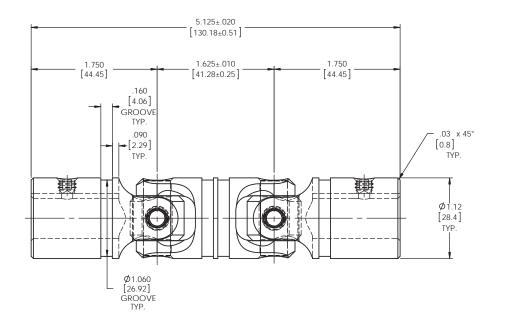

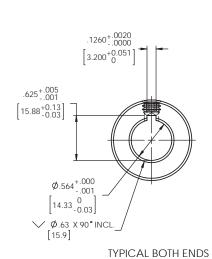

NOTE(s), UNLESS OTHERWISE SPECIFIED.

- (1) UNIVERSAL JOINT IS MARKED W/ "BELDEN" LOGO, PART NUMBER / DRAWING NUMBER, REVISION LEVEL (IF ANY), DATE OF MANUFACTURE (MO/YR), AND BELDEN JOB NUMBER.
- (2) UNIVERSAL JOINT IS LUBRICATED w/ LUBRIPLATE 1200-2, NLGI GRADE 2, AW/EP, LITHIUM GREASE OR EQUIVALENT.
- (3) UNIVERSAL JOINT IS CAPABLE OF OPERATING AT ANY ANGLE UP TO AND INCLUDING 45°, 90° FOR THE DOUBLE UNIVERSAL JOINT.
- (4) UNIVERSAL JOINT HAS STANDARD GROOVES TO ACCEPT INSTALLATION OF PROTECTIVE COVERS (BOOTS). BOOTS AVAILABLE SEPARATELY. REFER TO BELDEN CATALOG, WEBSITE, OR CONTACT BELDEN SALES.
- (5) REFER TO BELDEN CATALOG, WEBSITE, OR CONTACT BELDEN SALES FOR TORQUE CAPACITY.
- (6) THIS DRAWING REPRESENTS A STANDARD BELDEN ITEM.
  CUSTOM UNIVERSAL JOINTS ARE AVAILABLE UPON REQUEST. PLEASE CONTACT BELDEN SALES.

BELDEN PART NUMBER: DUJ-HD1125x563K

DO NOT SCALE DRAWING

	UNLESS OTHERWISE SPECIFIED	STANDARD TOLERANCES, LINLESS OTHERWISE SPECIFIED	MATERIAL	V CTEEL		NAME	DATE		Belden Incorpo	rate	d	
-	BREAK ALL SHARP CORNERS DE-BURR ALL FEATURES		ALLOY STEEL	DRAWN	JP	23JUL12	www.beldenuniversal.com  TITLE:			m		
-		DIMENSIONS ARE IN INCHES [mm]			CHECKED	RNK				24JUL12		
	TURNED SURFACES: 63	ANGULAR MACHINED: ±1.0° FRACTIONAL: ±.015"	HEAT TREAT SEE I	DETAILS	ENG APPR.		24JUL12	ASSEMBLY, DC		DUB	UBLE	
	125/	TWO PLACE DECIMAL: ±.010"			MFG APPR.				UNIVERSAL J		IT	
L	MILLED SURFACES: V	THREE PLACE DECIMAL: ±.005" FOUR PLACE DECIMAL: ±.0005" CONCENTRICITY: .0025" T.I.R.			Q.A.			UNIVERSAL JO			ווווו	
-	PROPRIETARY AND CONFIDENTIAL				COMMENTS:							
	THE INFORMATION CONTAINED IN THIS	ALL HOLES TO BE LOCATED ON	FINISH					SIZE	DWG. NO.		REV	
- 1	DRAWING IS THE SOLE PROPERTY OF BELDENING ORPORATED. ANY REPRODUCTION IN PART OR AS A WHOLE	CENTERLINE (Q ) WITHIN .005" T.I.R.	l N	ONE				C	DUJ-HD1125x56	3K		
	WITHOUT THE WRITTEN PERMISSION OF	INTERPRET GEOMETRIC TOLERANCES					_					
	BELDEN INCORPORATED IS PROHIBITED.	I.A.W. ANSI Y14.5M-1982						SCAL	E: 1.5:1 WT (Lbs): 0.997	SHEET	1 OF 2	
								$\neg$				