

## INFORMATION IN THIS DRAWING PROVIDED FOR REFERENCE ONLY

ANGULAR MACHINED: FRACTIONAL: TWO PLACE DECIMAL: THREE PLACE DECIMAL: FOUR PLACE DECIMAL: CONCENTRICITY:

ALL HOLES TO BE LOCATED ON CENTERLINE ( Q ) WITHIN .005\* T.I.R

NTERPRET GEOMETRIC TOLERANCES I.A.W. ASME Y14.5

URNED SURFACES: V

MILLED SURFACES:

DRAWING IS THE SOLE PROPERTY BELDENUNIVERSAL AN

PRODUCTION IN PART OR AS A WHO MITHOUT THE WRITTEN PERMISSION OF BELDEN UNIVERSAL IS PROHIBITED

PROPRIETARY AND CONFIDENTIA

**ΕΔΤ ΤΡΕΔΤ** 

SEE DETAIL

DRAWINGS

NONE

NG APPF

IEG APPI

C APPR.

COMMENTS

2

ASSEMBLY, DOUBLE

UNIVERSAL JOINT

SCALE: 3:5 WT (Lbs): 47.346 SHEET 1 OF 2

A DUJ-HD4000x00

REV

SIZE DWG. NO.

±1.0

±.013 ±.010' L: ±.005' L: ±.0005' .0025'' T.I.R.

ZONE REV. 1


DATE

APPROVED

REVISIONS

DESCRIPTION

SCALE 1 : 3

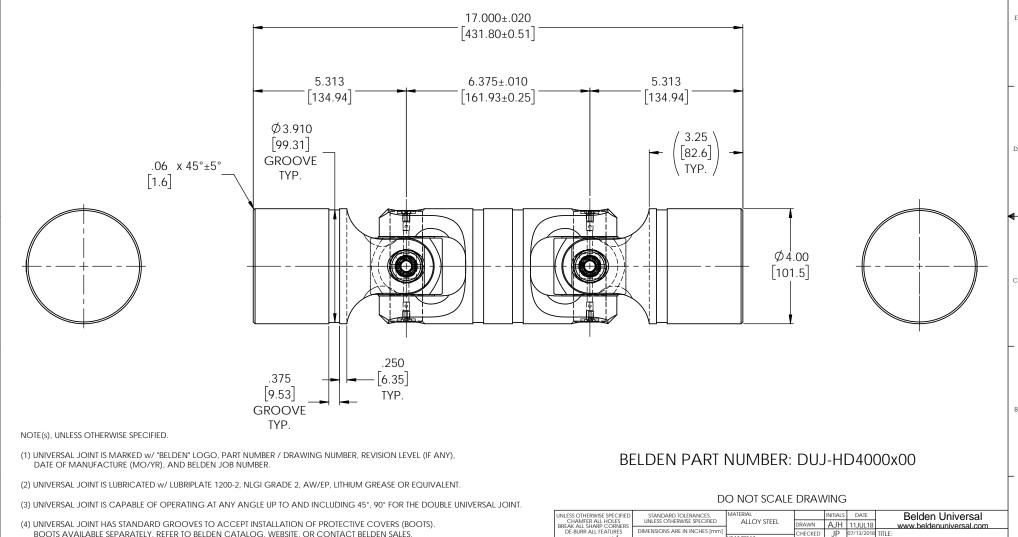

BOOTS AVAILABLE SEPARATELY, REFER TO BELDEN CATALOG, WEBSITE, OR CONTACT BELDEN SALES. (5) REFER TO BELDEN CATALOG, WEBSITE, OR CONTACT BELDEN SALES FOR TORQUE CAPACITY.

(6) THIS DRAWING REPRESENTS A STANDARD BELDEN ITEM

FORM SW-A 5-18 8

CUSTOM UNIVERSAL JOINTS ARE AVAILABLE UPON REQUEST. PLEASE CONTACT BELDEN SALES.

6