
REVISIONS

ZONE REV. DESCRIPTION DATE APPROVED

INFORMATION IN THIS DRAWING PROVIDED FOR REFERENCE ONLY

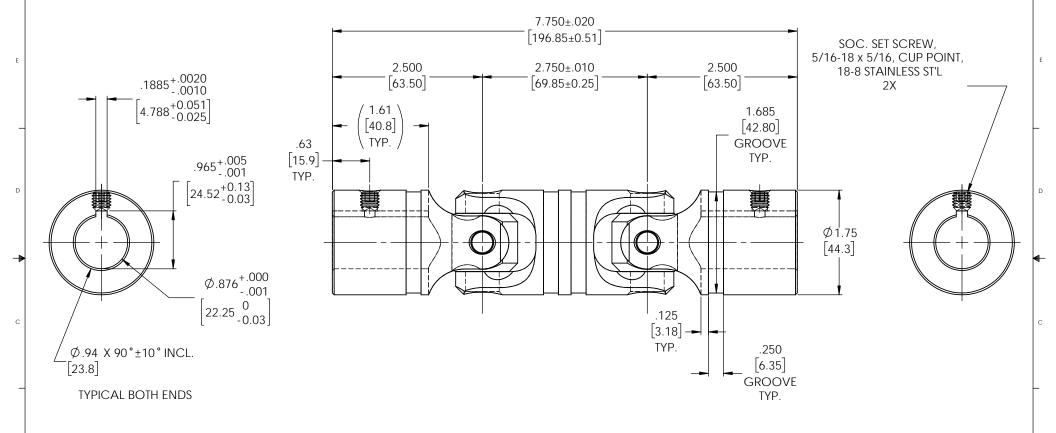

NOTE(s), UNLESS OTHERWISE SPECIFIED.

- (1) UNIVERSAL JOINT IS MARKED w/ "BELDEN" LOGO, PART NUMBER / DRAWING NUMBER, REVISION LEVEL (IF ANY), DATE OF MANUFACTURE (MO/YR), AND BELDEN JOB NUMBER.
- (2) UNIVERSAL JOINT IS LUBRICATED W/ LUBRIPLATE 1200-2, NLGI GRADE 2, AW/EP, LITHIUM GREASE OR EQUIVALENT.
- (3) UNIVERSAL JOINT IS CAPABLE OF OPERATING AT ANY ANGLE UP TO AND INCLUDING 45°, 90° FOR THE DOUBLE UNIVERSAL JOINT.
- (4) UNIVERSAL JOINT HAS STANDARD GROOVES TO ACCEPT INSTALLATION OF PROTECTIVE COVERS (BOOTS). BOOTS AVAILABLE SEPARATELY, REFER TO BELDEN CATALOG, WEBSITE, OR CONTACT BELDEN SALES.
- (5) REFER TO BELDEN CATALOG, WEBSITE, OR CONTACT BELDEN SALES FOR TORQUE CAPACITY.
- (6) THIS DRAWING REPRESENTS A STANDARD BELDEN ITEM.
 CUSTOM UNIVERSAL JOINTS ARE AVAILABLE UPON REQUEST. PLEASE CONTACT BELDEN SALES.

BELDEN P/N DUJ-SS1750x875K

DO NOT SCALE DRAWING

DO NOT SCALE DRAWING								
UNLESS OTHERWISE SPECIFIED		MATERIAL		INITIALS	DATE		Belden Univers	sal
CHAMFER ALL HOLES BREAK ALL SHARP CORNERS	UNLESS OTHERWISE SPECIFIED	STAINLESS STEEL	DRAWN	AJH	17JUL18		www.beldenuniversal	.com
DE-BURR ALL FEATURES	DIMENSIONS ARE IN INCHES [mm]		CHECKED	JP	07/18/2018	TITLE:	ACCEMBLY DOL	IDLE
TURNED SURFACES: 63	ANGULAR MACHINED: ±1.0° FRACTIONAL: ±.015"	HEAT TREAT SEE DETAIL	ENG APPR.				ASSEMBLY, DOL	
125/	TWO PLACE DECIMAL: ±.010"	DRAWINGS	MFG APPR.				UNIVERSAL JOI	
MILLED SURFACES: V	THREE PLACE DECIMAL: ±.005" FOUR PLACE DECIMAL: ±.0005"		QC APPR.				STAINLESS STE	EL
PROPRIETARY AND CONFIDENTIAL	CONCENTRICITY: .0025" T.I.R.	CINIDAL	COMMENT	S:				
THE INFORMATION CONTAINED IN THIS	ALL HOLES TO BE LOCATED ON	FINISH				SIZE	DWG. NO.	REV
DRAWING IS THE SOLE PROPERTY OF BELDEN UNIVERSAL ANY	CENTERLINE (Q) WITHIN .005" T.I.R.	NONE				Δ	DUJ-SS1750x875	5K
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF	INTERPRET GEOMETRIC TOLERANCES					, ,	D05 9517 90X075	719
BELDEN UNIVERSAL IS PROHIBITED.	I.A.W. ASME Y14.5					SCAL	E: 5:4 WT (Lbs): 3.790 SF	HEET 1 OF 2
4	2		2			1	1	

FORM SW-A 5-18 8