

REVISIONS

 ZONE
 REV.
 DESCRIPTION
 DATE
 APPROVE

INFORMATION IN THIS DRAWING PROVIDED FOR REFERENCE ONLY

SCALE 1.5:1

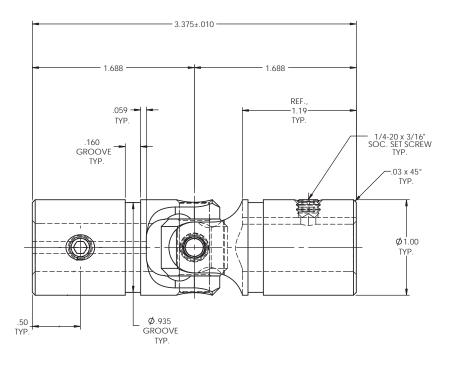



TYPICAL BOTH ENDS

NOTE(s), UNLESS OTHERWISE SPECIFIED.

- (1) UNIVERSAL JOINT IS MARKED W/ "BELDEN" LOGO, PART NUMBER / DRAWING NUMBER, REVISION LEVEL (IF ANY), DATE OF MANUFACTURE (MO/YR), AND BELDEN JOB NUMBER.
- (2) UNIVERSAL JOINT IS LUBRICATED w/ LUBRIPLATE 1200-2, NLGI GRADE 2, AW/EP, LITHIUM GREASE OR EQUIVALENT.
- (3) UNIVERSAL JOINT IS CAPABLE OF OPERATING AT ANY ANGLE UP TO AND INCLUDING 45°.
- . (4) UNIVERSAL JOINT HAS STANDARD GROOVES TO ACCEPT INSTALLATION OF PROTECTIVE COVER (BOOT). BOOT AVAILABLE SEPARATELY. REFER TO BELDEN CATALOG, WEBSITE, OR CONTACT BELDEN SALES.
- (5) REFER TO BELDEN CATALOG, WEBSITE, OR CONTACT BELDEN SALES FOR TORQUE CAPACITY.
- (6) THIS DRAWING REPRESENTS A STANDARD BELDEN ITEM.
 CUSTOM UNIVERSAL JOINTS ARE AVAILABLE UPON REQUEST. PLEASE CONTACT BELDEN SALES.

BELDEN PART NUMBER: UJ-HD1000x500K

DO NOT SCALE DRAWING

DO NOT SCALE DIAWNING								
UNLESS OTHERWISE SPECIFIED	STANDARD TOLERANCES, LINLESS OTHERWISE SPECIFIED	MATERIAL ALLOY STEFI		NAME	DATE		Belden Incorporate	ed
BREAK ALL SHARP CORNERS		ALLOY SIEEL	DRAWN	JP	23MAR12		www.beldenuniversal.co	m
DE-BURR ALL FEATURES	DIMENSIONS ARE IN INCHES [mm]	HEAT TREAT	CHECKED	RNK	17APR12	TITLE:		
TURNED SURFACES: 63	ANGULAR MACHINED: ±1.0° FRACTIONAL: ±.015"	SEE DETAIL	ENG APPR.	RNK	17APR12		ASSEMBLY.	
125/	TWO PLACE DECIMAL: ±.010"	DRAWINGS	MFG APPR.				UNIVERSAL JOIN	JT
MILLED SURFACES: V	THREE PLACE DECIMAL: ±.005" FOUR PLACE DECIMAL: ±.0005"		Q.A.				UNIVERSAL JOIL	N I
PROPRIETARY AND CONFIDENTIAL	CONCENTRICITY: .0025" T.I.R.		COMMENTS:					
THE INFORMATION CONTAINED IN THIS	ALL HOLES TO BE LOCATED ON	FINISH				SIZE	DWG. NO.	REV
DRAWING IS THE SOLE PROPERTY OF BELDENINCORPORATED. ANY	CENTERLINE (Q) WITHIN .005" T.I.R.	NONE				C	UJ-HD1000x500K	
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF	INTERPRET GEOMETRIC TOLERANCES					$\overline{}$	03 TID 1000X300K	
BELDEN INCORPORATED IS PROHIBITED.	I.A.W. ANSI Y14.5M-1982					SCAL	E: 2:1 WT (Lbs): 0.503 SHEET	T 1 OF 2
	2		^			\neg		