

REVISIONS

ZONE REV. DESCRIPTION DATE A

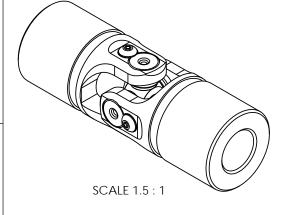

INFORMATION IN THIS DRAWING PROVIDED FOR REFERENCE ONLY

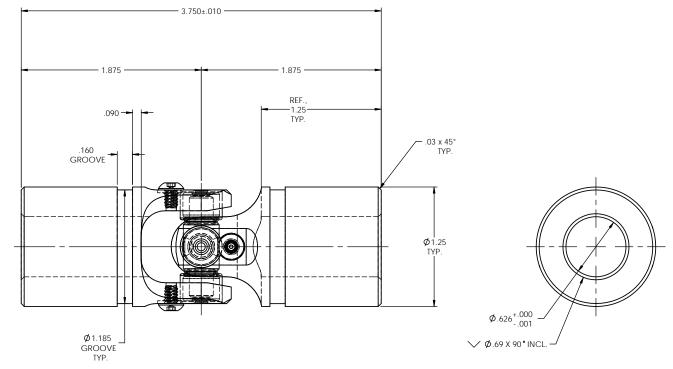

TYPICAL BOTH ENDS

NOTE(s), UNLESS OTHERWISE SPECIFIED.

- (1) UNIVERSAL JOINT IS MARKED w/ "BELDEN" LOGO, PART NUMBER / DRAWING NUMBER, REVISION LEVEL (IF ANY), DATE OF MANUFACTURE (MO/YR), AND BELDEN JOB NUMBER.
- (2) UNIVERSAL JOINT IS LUBRICATED w/ TRIBOLUBE 12, NLGI GRADE 2, MULTI-PURPOSE SYNTHETIC GREASE.
- (3) UNIVERSAL JOINT IS CAPABLE OF OPERATING AT ANY ANGLE UP TO AND INCLUDING 45°, 90° FOR THE DOUBLE UNIVERSAL JOINT.
- (4) UNIVERSAL JOINT HAS STANDARD GROOVES TO ACCEPT INSTALLATION OF PROTECTIVE COVERS (BOOTS). BOOTS AVAILABLE SEPARATELY. REFER TO BELDEN CATALOG, WEBSITE, OR CONTACT BELDEN SALES.
- (5) REFER TO BELDEN CATALOG, WEBSITE, OR CONTACT BELDEN SALES FOR TORQUE CAPACITY.
- (6) THIS DRAWING REPRESENTS A STANDARD BELDEN ITEM.
 CUSTOM UNIVERSAL JOINTS ARE AVAILABLE UPON REQUEST, PLEASE CONTACT BELDEN SALES.

BELDEN PART NUMBER: UJ-NB1250x625

DO NOT SCALE DRAWING

UNLESS OTHERWISE SPECIFIED CHAMFER ALL HOLES BREAK ALL SHARP CORNERS		STANDARD TOLERANCES, LINLESS OTHERWISE SPECIFIED	MATERIAL ALLOY STEEL			NAME	DATE		Belden In	Incorporated		
					DRAWN	JP	03MAY13	www.beldenuniversal.com			m	
DE-BURR	ALL FEATURES	DIMENSIONS ARE IN INCHES [mm]			CHECKED	RNK	D3MAY13	TITLE:	ASSEIVIBLY,			
TURNED SU	IREACES: 63	ANGULAR MACHINED: ±1.0° FRACTIONAL: ±.015° TWO PLACE DECIMAL: ±.010° THREE PLACE DECIMAL: ±.0005° FOUR PLACE DECIMAL: ±.0005°	HEAT TREAT	NONE	ENG APPR.		03MAY13					
TOMINED SO	125/				MFG APPR.				UNIVERS.	AL J	JOINI,	
MILLED SUF	rfaces: V				Q.A.				NEEDLE BEARING			
PROPRIETARY AND CONFIDENTIAL		CONCENTRICITY: .0025" T.I.R.			COMMENTS:					DE, (
	N CONTAINED IN THIS	ALL HOLES TO BE LOCATED ON	FINISH	NONE				SIZE	DWG. NO.			REV
BELDENING	IE SOLE PROPERTY OF C O R P O R A T E D. ANY N IN PART OR AS A WHOLE	CENTERLINE (Q) WITHIN .005" T.I.R.	l n				l C	UJ-NB1250x		25		
WITHOUT THE WR	ITTEN PERMISSION OF	INTERPRET GEOMETRIC TOLERANCES						_			النا	
BELDEN INCORPO	DRATED IS PROHIBITED.	I.A.W. ANSI Y14.5M-1982						SCAL	E: 2:1 WT (Lbs):	0.798	SHEET	1 OF 2